

Dear User.

Hereby we would like to inform you, that our site and also this service will end on December 31st, 2018. Please use the Philips product catalog for family and product pages at [www.lighting.philips.com](http://www.lighting.philips.com).

If you received this page via third-party site, please inform their website administrator about this message.



### 10 - 15% more efficient!

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic HF control gear with integrated pre-heat and is provided with a plug-in/pull-out lamp base.

#### Benefits

- Optimal light performance for short or long operation per switch-on
- Multiple light color choice
- Good color rendering (CRI > 80)
- Dimming possible down to 10%

#### Features

- 4-pin base
- Fluorescent tri-phosphor technology
- Low light depreciation over lamp life

#### Environment

- Good environmental choice because of high energy efficiency, long life and low light output depreciation, lowest mercury content

- Compliant with all RoHS and WEEE requirements: the lamps have a very low content of mercury, are lead free and make no use of radioactive materials and hazardous flame retardants


#### Application

- Designed for general or supplementary lighting in professional or home environments
- Recessed or surface-mounted downlighters, wall units, table lamps and pendant lamps

#### Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i. e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Dimension Drawing

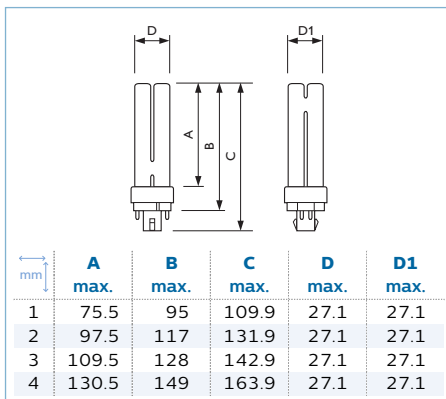

### Product Range



### Main Data


#### MASTER PL-C

Wattage/Light source color/Pins	SAP Packing (Piece)/Pack-aging configuration	Cap-Base	Luminous Flux (Rated)	Life to 50% Failures Preheat	Energy Consumption kWh/1000 h	Photo letter	Ordering number
			(lm)	(h)	(kWh)		
10W/830/4P	CT/ 50	G24Q-1	600	13,000	11	A 1	871150062329470
10W/840/4P	CT/ 50	G24Q-1	600	13,000	11	A 1	871150062330070
13W/827/4P	CT/ 50	G24Q-1	925	13,000	15	A 2	692341076121400
13W/827/4P	CT/ 50	G24Q-1	925	13,000	15	A 2	871150062326300
13W/827/4P	CT/ 50	G24Q-1	925	13,000	15	A 2	871150062326370

More data see next page



### MASTER PL-C

Wattage/Light source color/Pins	SAP Packing (Piece)/Packaging configuration	Cap-Base	Luminous Flux (Rated)	Life to 50% Failures Preheat	Energy Consumption kWh/1000 h	 mm	Photo letter	Ordering number
			(lm)	(h)	(kWh)			
13W/830/4P	CT / 50	G24Q-1	900	13,000	15	A 2	B	871150062331770
13W/830/4P	CT / 50	G24Q-1	900	13,000	15	A 2	B	692341076122100
13W/830/4P	CT / 50	G24Q-1	900	13,000	15	A 2	B	871150062331700
13W/840/4P	CT / 50	G24Q-1	925	13,000	15	A 2	B	871150062332470
13W/840/4P	CT / 50	G24Q-1	925	13,000	15	A 2	B	692341076123800
13W/840/4P	CT / 50	G24Q-1	925	13,000	15	A 2	B	871150062332400
13W/865/4P	CT / 50	G24Q-1	845	13,000	15	B 2	B	692341076124500
13W/865/4P	CT / 50	G24Q-1	845	13,000	15	B 2	B	871150027703900
16.5W/827/4P	CT / 50	G24Q-2	1,200	13,000	20	A 3	C	692341076125200
16.5W/827/4P	CT / 50	G24Q-2	1,200	13,000	20	A 3	C	871150062327000
16.5W/827/4P	CT / 50	G24Q-2	1,200	13,000	20	A 3	C	871150062327070
16.5W/830/4P	CT / 50	G24Q-2	1,200	13,000	20	A 3	C	871150062333170
16.5W/830/4P	CT / 50	G24Q-2	1,200	13,000	20	A 3	C	692341076126900
16.5W/830/4P	CT / 50	G24Q-2	1,200	13,000	20	A 3	C	871150062333100
18W/840/4P	CT / 50	G24Q-2	1,200	13,000	20	A 3	C	871150062334870
18W/840/4P	CT / 50	G24Q-2	1,200	13,000	20	A 3	C	692341076127600
18W/840/4P	CT / 50	G24Q-2	1,200	13,000	20	A 3	C	871150027631500
18W/840/4P	CT / 50	G24Q-2	1,200	13,000	20	A 3	C	871150062334800
18W/865/4P	CT / 50	G24Q-2	1,120	13,000	20	B 3	C	692341076128300
18W/865/4P	CT / 50	G24Q-2	1,120	13,000	20	B 3	C	871150027704600
26W/827/4P	CT / 50	G24Q-3	1,800	13,000	29	A 4	D	871150027632200
26W/827/4P	CT / 50	G24Q-3	1,800	13,000	29	A 4	D	871150062328700
26W/827/4P	CT / 50	G24Q-3	1,800	13,000	29	A 4	D	871150062328770
26W/830/4P	CT / 50	G24Q-3	1,800	13,000	29	A 4	D	871150062335570
26W/830/4P	CT / 50	G24Q-3	1,800	13,000	29	A 4	D	692341076130600
26W/830/4P	CT / 50	G24Q-3	1,800	13,000	29	A 4	D	871150027633900
26W/830/4P	CT / 50	G24Q-3	1,800	13,000	29	A 4	D	871150062335500
26W/840/4P	CT / 50	G24Q-3	1,800	13,000	29	A 4	D	871150062336270
26W/840/4P	CT / 50	G24Q-3	1,800	13,000	29	A 4	D	692341076131300
26W/840/4P	CT / 50	G24Q-3	1,800	13,000	29	A 4	D	871150027634600
26W/840/4P	CT / 50	G24Q-3	1,800	13,000	29	A 4	D	871150062336200
26W/865/4P	CT / 50	G24Q-3	1,740	13,000	29	B 4	D	692341076132000
26W/865/4P	CT / 50	G24Q-3	1,740	13,000	29	B 4	D	871150027705300

### Electrical data

Commercial product name	Lamp Current (A)	Lamp power (W)
MASTER PL-C 10W/830/4P 1CT/5X10BOX	0.190	10.0
MASTER PL-C 10W/840/4P 1CT/5X10BOX	0.190	10.0
MASTER PL-C 13W/827/4P 1CT/5X10BOX	0.170	13.0
MASTER PL-C 13W/827/4P 1CT/5X10CC	0.170	13.0
MASTER PL-C 13W/830/4P 1CT/5X10BOX	0.170	13.0
MASTER PL-C 13W/830/4P 1CT/5X10CC	0.170	13.0
MASTER PL-C 13W/840/4P 1CT/5X10BOX	0.170	13.0
MASTER PL-C 13W/840/4P 1CT/5X10CC	0.170	13.0
MASTER PL-C 13W/865/4P 1CT/5X10BOX	0.170	13.0
MASTER PL-C 13W/865/4P 1CT/5X10CC	0.170	13.0
MASTER PL-C 18W/827/4P 1CT/5X10BOX	0.230	16.5
MASTER PL-C 18W/827/4P 1CT/5X10CC	0.230	16.5
MASTER PL-C 18W/830/4P 1CT/5X10BOX	0.230	16.5
MASTER PL-C 18W/830/4P 1CT/5X10CC	0.230	16.5
MASTER PL-C 18W/840/4P 1CT/5X10BOX	0.230	18.0
MASTER PL-C 18W/840/4P 1CT/5X10CC	0.230	18.0
MASTER PL-C 18W/865/4P 1CT/5X10BOX	0.230	18.0
MASTER PL-C 18W/865/4P 1CT/5X10CC	0.230	18.0
MASTER PL-C 26W/827/4P 1CT/5X10BOX	0.335	26.0
MASTER PL-C 26W/827/4P 1CT/5X10CC	0.335	26.0
MASTER PL-C 26W/830/4P 1CT/5X10BOX	0.335	26.0

More data see next page



Commercial product name	Lamp Current (A)	Lamp power (W)
MASTER PL-C 26W/830/4P 1CT/5X10CC	0.335	26.0
MASTER PL-C 26W/840/4P 1CT/5X10BOX	0.335	26.0
MASTER PL-C 26W/840/4P 1CT/5X10CC	0.335	26.0
MASTER PL-C 26W/865/4P 1CT/5X10BOX	0.335	26.0

### Lifetime data

Commercial product name	Life to 10% Failures Preheat (h)	Life to 50% Failures Preheat (h)
MASTER PL-C 10W/830/4P 1CT/5X10BOX	8,000	13,000
MASTER PL-C 10W/840/4P 1CT/5X10BOX	8,000	13,000
MASTER PL-C 13W/827/4P 1CT/5X10BOX	8,000	13,000
MASTER PL-C 13W/827/4P 1CT/5X10CC	8,000	13,000
MASTER PL-C 13W/830/4P 1CT/5X10BOX	8,000	13,000
MASTER PL-C 13W/830/4P 1CT/5X10CC	8,000	13,000
MASTER PL-C 13W/840/4P 1CT/5X10BOX	8,000	13,000
MASTER PL-C 13W/840/4P 1CT/5X10CC	8,000	13,000
MASTER PL-C 13W/865/4P 1CT/5X10BOX	8,000	13,000
MASTER PL-C 13W/865/4P 1CT/5X10CC	8,000	13,000
MASTER PL-C 18W/827/4P 1CT/5X10BOX	8,000	13,000
MASTER PL-C 18W/827/4P 1CT/5X10CC	8,000	13,000
MASTER PL-C 18W/830/4P 1CT/5X10BOX	8,000	13,000
MASTER PL-C 18W/830/4P 1CT/5X10CC	8,000	13,000
MASTER PL-C 18W/840/4P 1CT/5X10BOX	8,000	13,000
MASTER PL-C 18W/840/4P 1CT/5X10CC	8,000	13,000
MASTER PL-C 18W/865/4P 1CT/5X10BOX	8,000	13,000
MASTER PL-C 18W/865/4P 1CT/5X10CC	8,000	13,000
MASTER PL-C 26W/827/4P 1CT/5X10BOX	8,000	13,000
MASTER PL-C 26W/827/4P 1CT/5X10CC	8,000	13,000
MASTER PL-C 26W/830/4P 1CT/5X10BOX	8,000	13,000
MASTER PL-C 26W/830/4P 1CT/5X10CC	8,000	13,000
MASTER PL-C 26W/840/4P 1CT/5X10BOX	8,000	13,000
MASTER PL-C 26W/840/4P 1CT/5X10CC	8,000	13,000
MASTER PL-C 26W/865/4P 1CT/5X10BOX	8,000	13,000

### Color data

Commercial product name	Colour Rendering Index	Light source color <sup>1</sup>	Color Designation
MASTER PL-C 10W/830/4P 1CT/5X10BOX	82	830	Warm White (WW)
MASTER PL-C 10W/840/4P 1CT/5X10BOX	82	840	Cool White (CW)
MASTER PL-C 13W/827/4P 1CT/5X10BOX	82	827	Incandescent White
MASTER PL-C 13W/827/4P 1CT/5X10CC	82	827	Incandescent White
MASTER PL-C 13W/830/4P 1CT/5X10BOX	82	830	Warm White (WW)
MASTER PL-C 13W/830/4P 1CT/5X10CC	82	830	Warm White (WW)
MASTER PL-C 13W/840/4P 1CT/5X10BOX	82	840	Cool White (CW)
MASTER PL-C 13W/840/4P 1CT/5X10CC	82	840	Cool White (CW)
MASTER PL-C 13W/865/4P 1CT/5X10BOX	80	865	Cool Daylight
MASTER PL-C 13W/865/4P 1CT/5X10CC	80	865	Cool Daylight
MASTER PL-C 18W/827/4P 1CT/5X10BOX	82	827	Incandescent White
MASTER PL-C 18W/827/4P 1CT/5X10CC	82	827	Incandescent White
MASTER PL-C 18W/830/4P 1CT/5X10BOX	82	830	Warm White (WW)
MASTER PL-C 18W/830/4P 1CT/5X10CC	82	830	Warm White (WW)
MASTER PL-C 18W/840/4P 1CT/5X10BOX	82	840	Cool White (CW)
MASTER PL-C 18W/840/4P 1CT/5X10CC	82	840	Cool White (CW)
MASTER PL-C 18W/865/4P 1CT/5X10BOX	80	865	Cool Daylight
MASTER PL-C 18W/865/4P 1CT/5X10CC	80	865	Cool Daylight
MASTER PL-C 26W/827/4P 1CT/5X10BOX	82	827	Incandescent White
MASTER PL-C 26W/827/4P 1CT/5X10CC	82	827	Incandescent White
MASTER PL-C 26W/830/4P 1CT/5X10BOX	82	830	Warm White (WW)
MASTER PL-C 26W/830/4P 1CT/5X10CC	82	830	Warm White (WW)
MASTER PL-C 26W/840/4P 1CT/5X10BOX	82	840	Cool White (CW)
MASTER PL-C 26W/840/4P 1CT/5X10CC	82	840	Cool White (CW)
MASTER PL-C 26W/865/4P 1CT/5X10BOX	80	865	Cool Daylight

<sup>1</sup> 'Light source color' value description(s): '827' = CCT of 2700K, '830' = CCT of 3000K, '840' = CCT of 4000K, '865' = CCT of 6500K



### Luminous flux/efficacy/intensity data

Commercial product name	Luminous Flux (Rated)	Luminous Flux	Luminous Efficacy (Rated)
	(lm)	(lm)	(lm/W)
MASTER PL-C 10W/830/4P 1CT/5X10BOX	600	600	60.0
MASTER PL-C 10W/840/4P 1CT/5X10BOX	600	600	60.0
MASTER PL-C 13W/827/4P 1CT/5X10BOX	925	925	69.0
MASTER PL-C 13W/827/4P 1CT/5X10CC	925	925	69.0
MASTER PL-C 13W/830/4P 1CT/5X10BOX	900	900	72.0
MASTER PL-C 13W/830/4P 1CT/5X10CC	900	900	72.0
MASTER PL-C 13W/840/4P 1CT/5X10BOX	925	925	69.0
MASTER PL-C 13W/840/4P 1CT/5X10CC	925	925	69.0
MASTER PL-C 13W/865/4P 1CT/5X10BOX	845	845	63.0
MASTER PL-C 13W/865/4P 1CT/5X10CC	845	845	63.0
MASTER PL-C 18W/827/4P 1CT/5X10BOX	1,200	1,200	67.0
MASTER PL-C 18W/827/4P 1CT/5X10CC	1,200	1,200	67.0
MASTER PL-C 18W/830/4P 1CT/5X10BOX	1,200	1,200	67.0
MASTER PL-C 18W/830/4P 1CT/5X10CC	1,200	1,200	67.0
MASTER PL-C 18W/840/4P 1CT/5X10BOX	1,200	1,200	67.0
MASTER PL-C 18W/840/4P 1CT/5X10CC	1,200	1,200	67.0
MASTER PL-C 18W/865/4P 1CT/5X10BOX	1,120	1,120	62.3
MASTER PL-C 18W/865/4P 1CT/5X10CC	1,120	1,120	62.3
MASTER PL-C 26W/827/4P 1CT/5X10BOX	1,800	1,800	67.0
MASTER PL-C 26W/827/4P 1CT/5X10CC	1,800	1,800	67.0
MASTER PL-C 26W/830/4P 1CT/5X10BOX	1,800	1,800	67.0
MASTER PL-C 26W/830/4P 1CT/5X10CC	1,800	1,800	67.0
MASTER PL-C 26W/840/4P 1CT/5X10BOX	1,800	1,800	67.0
MASTER PL-C 26W/840/4P 1CT/5X10CC	1,800	1,800	67.0
MASTER PL-C 26W/865/4P 1CT/5X10BOX	1,740	1,740	66.0

### Rated Lumen Maintenance data

Commercial product name	LLMF 2000 h Rated	LLMF 4000 h Rated	LLMF 6000 h Rated	LLMF 8000 h Rated	LLMF 12000 h Rated
	(%)	(%)	(%)	(%)	(%)
MASTER PL-C 10W/830/4P 1CT/5X10BOX	92	87	83	81	
MASTER PL-C 10W/840/4P 1CT/5X10BOX	92	87	83	81	
MASTER PL-C 13W/827/4P 1CT/5X10BOX	92	87	83	81	
MASTER PL-C 13W/827/4P 1CT/5X10CC	92	87	83	81	
MASTER PL-C 13W/830/4P 1CT/5X10BOX	92	87	83	81	
MASTER PL-C 13W/830/4P 1CT/5X10CC	92	87	83	81	
MASTER PL-C 13W/840/4P 1CT/5X10BOX	92	87	83	81	
MASTER PL-C 13W/840/4P 1CT/5X10CC	92	87	83	81	
MASTER PL-C 13W/865/4P 1CT/5X10BOX	90	85	81	77	
MASTER PL-C 13W/865/4P 1CT/5X10CC	90	85	81	77	
MASTER PL-C 18W/827/4P 1CT/5X10BOX	92	87	83	81	
MASTER PL-C 18W/827/4P 1CT/5X10CC	92	87	83	81	
MASTER PL-C 18W/830/4P 1CT/5X10BOX	92	87	83	81	81
MASTER PL-C 18W/830/4P 1CT/5X10CC	92	87	83	81	81
MASTER PL-C 18W/840/4P 1CT/5X10BOX	92	87	83	81	
MASTER PL-C 18W/840/4P 1CT/5X10CC	92	87	83	81	
MASTER PL-C 18W/865/4P 1CT/5X10BOX	90	85	81	77	
MASTER PL-C 18W/865/4P 1CT/5X10CC	90	85	81	77	
MASTER PL-C 26W/827/4P 1CT/5X10BOX	92	87	83	81	
MASTER PL-C 26W/827/4P 1CT/5X10CC	92	87	83	81	
MASTER PL-C 26W/830/4P 1CT/5X10BOX	92	87	83	81	
MASTER PL-C 26W/830/4P 1CT/5X10CC	92	87	83	81	
MASTER PL-C 26W/840/4P 1CT/5X10BOX	92	87	83	81	
MASTER PL-C 26W/840/4P 1CT/5X10CC	92	87	83	81	
MASTER PL-C 26W/865/4P 1CT/5X10BOX	90	85	81	77	




## Temperature data

Commercial product name	Correlated Color Temperature	Design Temperature	Default Ambient Temperature
	(K)	(°C)	(°C)
MASTER PL-C 10W/830/4P 1CT/5X10BOX	3,000	28	25
MASTER PL-C 10W/840/4P 1CT/5X10BOX	4,000	28	25
MASTER PL-C 13W/827/4P 1CT/5X10BOX	2,700	28	25
MASTER PL-C 13W/827/4P 1CT/5X10CC	2,700	28	25
MASTER PL-C 13W/830/4P 1CT/5X10BOX	3,000	28	25
MASTER PL-C 13W/830/4P 1CT/5X10CC	3,000	28	25
MASTER PL-C 13W/840/4P 1CT/5X10BOX	4,000	28	25
MASTER PL-C 13W/840/4P 1CT/5X10CC	4,000	28	25
MASTER PL-C 13W/865/4P 1CT/5X10BOX	6,500	28	25
MASTER PL-C 13W/865/4P 1CT/5X10CC	6,500	28	25
MASTER PL-C 18W/827/4P 1CT/5X10BOX	2,700	28	25
MASTER PL-C 18W/827/4P 1CT/5X10CC	2,700	28	25
MASTER PL-C 18W/830/4P 1CT/5X10BOX	3,000	28	25
MASTER PL-C 18W/830/4P 1CT/5X10CC	3,000	28	25
MASTER PL-C 18W/840/4P 1CT/5X10BOX	4,000	28	25
MASTER PL-C 18W/840/4P 1CT/5X10CC	4,000	28	25
MASTER PL-C 18W/865/4P 1CT/5X10BOX	6,500	28	25
MASTER PL-C 18W/865/4P 1CT/5X10CC	6,500	28	25
MASTER PL-C 26W/827/4P 1CT/5X10BOX	2,700	28	25
MASTER PL-C 26W/827/4P 1CT/5X10CC	2,700	28	25
MASTER PL-C 26W/830/4P 1CT/5X10BOX	3,000	28	25
MASTER PL-C 26W/830/4P 1CT/5X10CC	3,000	28	25
MASTER PL-C 26W/840/4P 1CT/5X10BOX	4,000	28	25
MASTER PL-C 26W/840/4P 1CT/5X10CC	4,000	28	25
MASTER PL-C 26W/865/4P 1CT/5X10BOX	6,500	28	25



## Environmental data & ETIM group & Design Requirements


Commercial product name	Energy Consumption kWh/ 1000 h		Mercury (Hg) Content	ETIM Group <sup>2</sup>
	(kWh)		(mg)	
MASTER PL-C 10W/830/4P 1CT/5X10BOX	11	A	1.4	EC000087
MASTER PL-C 10W/840/4P 1CT/5X10BOX	11	A	1.4	EC000087
MASTER PL-C 13W/827/4P 1CT/5X10BOX	15	A	1.4	EC000087
MASTER PL-C 13W/827/4P 1CT/5X10CC	15	A	1.4	EC000087
MASTER PL-C 13W/830/4P 1CT/5X10BOX	15	A	1.4	EC000087
MASTER PL-C 13W/830/4P 1CT/5X10CC	15	A	1.4	EC000087
MASTER PL-C 13W/840/4P 1CT/5X10BOX	15	A	1.4	EC000087
MASTER PL-C 13W/840/4P 1CT/5X10CC	15	A	1.4	EC000087
MASTER PL-C 13W/865/4P 1CT/5X10BOX	15	B	1.4	EC000087
MASTER PL-C 13W/865/4P 1CT/5X10CC	15	B	1.4	EC000087
MASTER PL-C 18W/827/4P 1CT/5X10BOX	20	A	1.4	EC000087
MASTER PL-C 18W/827/4P 1CT/5X10CC	20	A	1.4	EC000087
MASTER PL-C 18W/830/4P 1CT/5X10BOX	20	A	1.4	EC000087
MASTER PL-C 18W/830/4P 1CT/5X10CC	20	A	1.4	EC000087
MASTER PL-C 18W/840/4P 1CT/5X10BOX	20	A	1.4	EC000087
MASTER PL-C 18W/840/4P 1CT/5X10CC	20	A	1.4	EC000087
MASTER PL-C 18W/865/4P 1CT/5X10BOX	20	B	1.4	EC000087
MASTER PL-C 18W/865/4P 1CT/5X10CC	20	B	1.4	EC000087
MASTER PL-C 26W/827/4P 1CT/5X10BOX	29	A	1.4	EC000087
MASTER PL-C 26W/827/4P 1CT/5X10CC	29	A	1.4	EC000087
MASTER PL-C 26W/830/4P 1CT/5X10BOX	29	A	1.4	EC000087
MASTER PL-C 26W/830/4P 1CT/5X10CC	29	A	1.4	EC000087
MASTER PL-C 26W/840/4P 1CT/5X10BOX	29	A	1.4	EC000087
MASTER PL-C 26W/840/4P 1CT/5X10CC	29	A	1.4	EC000087
MASTER PL-C 26W/865/4P 1CT/5X10BOX	29	B	1.4	EC000087

<sup>2</sup> 'ETIM Group' value description(s): 'EC000087' = Compact Fluor Lamp Non Integrated

## Rated Survival Factor data

Commercial product name	LSF Preheat 2000 h Rated (%)	LSF Preheat 4000 h Rated (%)	LSF Preheat 6000 h Rated (%)	LSF Preheat 8000 h Rated (%)	LSF Preheat 12000 h Rated (%)
MASTER PL-C 10W/830/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-C 10W/840/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-C 13W/827/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-C 13W/827/4P 1CT/5X10CC	99	98	97	90	60
MASTER PL-C 13W/830/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-C 13W/830/4P 1CT/5X10CC	99	98	97	90	60
MASTER PL-C 13W/840/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-C 13W/840/4P 1CT/5X10CC	99	98	97	90	60
MASTER PL-C 13W/865/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-C 13W/865/4P 1CT/5X10CC	99	98	97	90	60
MASTER PL-C 18W/827/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-C 18W/827/4P 1CT/5X10CC	99	98	97	90	60
MASTER PL-C 18W/830/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-C 18W/830/4P 1CT/5X10CC	99	98	97	90	60
MASTER PL-C 18W/840/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-C 18W/840/4P 1CT/5X10CC	99	98	97	90	60
MASTER PL-C 18W/865/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-C 18W/865/4P 1CT/5X10CC	99	98	97	90	60
MASTER PL-C 26W/827/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-C 26W/827/4P 1CT/5X10CC	99	98	97	90	60
MASTER PL-C 26W/830/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-C 26W/830/4P 1CT/5X10CC	99	98	97	90	60
MASTER PL-C 26W/840/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-C 26W/840/4P 1CT/5X10CC	99	98	97	90	60
MASTER PL-C 26W/865/4P 1CT/5X10BOX	99	98	97	90	60

## Operating data

Commercial product name	Default Burning Position	Default Gear		Default Cycle Time
MASTER PL-C 10W/830/4P 1CT/5X10BOX	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 10W/840/4P 1CT/5X10BOX	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 13W/827/4P 1CT/5X10BOX	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 13W/827/4P 1CT/5X10CC	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 13W/830/4P 1CT/5X10BOX	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 13W/830/4P 1CT/5X10CC	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 13W/840/4P 1CT/5X10BOX	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 13W/840/4P 1CT/5X10CC	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 13W/865/4P 1CT/5X10BOX	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 13W/865/4P 1CT/5X10CC	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 18W/827/4P 1CT/5X10BOX	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 18W/827/4P 1CT/5X10CC	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 18W/830/4P 1CT/5X10BOX	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 18W/830/4P 1CT/5X10CC	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 18W/840/4P 1CT/5X10BOX	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 18W/840/4P 1CT/5X10CC	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 18W/865/4P 1CT/5X10BOX	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 18W/865/4P 1CT/5X10CC	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 26W/827/4P 1CT/5X10BOX	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 26W/827/4P 1CT/5X10CC	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 26W/830/4P 1CT/5X10BOX	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 26W/830/4P 1CT/5X10CC	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 26W/840/4P 1CT/5X10BOX	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 26W/840/4P 1CT/5X10CC	Base up	Electronic	Yes	3 hour cycle
MASTER PL-C 26W/865/4P 1CT/5X10BOX	Base up	Electronic	Yes	3 hour cycle



### Miscellaneous & General data

Commercial product name	Cap-Base	Cap-Base Information <sup>3</sup>	ILCOS Code
MASTER PL-C 10W/830/4P 1CT/5X10BOX	G24Q-1	4P	FSQ-10/30/1B-E-G24q=1
MASTER PL-C 10W/840/4P 1CT/5X10BOX	G24Q-1	4P	FSQ-10/40/1B-E-G24q=1
MASTER PL-C 13W/827/4P 1CT/5X10BOX	G24Q-1	4P	FSQ-13/27/1B-E-G24q=1
MASTER PL-C 13W/827/4P 1CT/5X10CC	G24Q-1	4P	FSQ-13/27/1B-E-G24q=1
MASTER PL-C 13W/830/4P 1CT/5X10BOX	G24Q-1	4P	FSQ-13/30/1B-E-G24q=1
MASTER PL-C 13W/830/4P 1CT/5X10CC	G24Q-1	4P	FSQ-13/30/1B-E-G24q=1
MASTER PL-C 13W/840/4P 1CT/5X10BOX	G24Q-1	4P	FSQ-13/40/1B-E-G24q=1
MASTER PL-C 13W/840/4P 1CT/5X10CC	G24Q-1	4P	FSQ-13/40/1B-E-G24q=1
MASTER PL-C 13W/865/4P 1CT/5X10BOX	G24Q-1	4P	
MASTER PL-C 13W/865/4P 1CT/5X10CC	G24Q-1	4P	
MASTER PL-C 18W/827/4P 1CT/5X10BOX	G24Q-2	4P	FSQ-18/27/1B-E-G24q=2
MASTER PL-C 18W/827/4P 1CT/5X10CC	G24Q-2	4P	FSQ-18/27/1B-E-G24q=2
MASTER PL-C 18W/830/4P 1CT/5X10BOX	G24Q-2	4P	FSQ-18/30/1B-E-G24q=2
MASTER PL-C 18W/830/4P 1CT/5X10CC	G24Q-2	4P	FSQ-18/30/1B-E-G24q=2
MASTER PL-C 18W/840/4P 1CT/5X10BOX	G24Q-2	4P	FSQ-18/40/1B-E-G24q=2
MASTER PL-C 18W/840/4P 1CT/5X10CC	G24Q-2	4P	FSQ-18/40/1B-E-G24q=2
MASTER PL-C 18W/865/4P 1CT/5X10BOX	G24Q-2	4P	
MASTER PL-C 18W/865/4P 1CT/5X10CC	G24Q-2	4P	
MASTER PL-C 26W/827/4P 1CT/5X10BOX	G24Q-3	4P	FSQ-26/27/1B-E-G24q=3
MASTER PL-C 26W/827/4P 1CT/5X10CC	G24Q-3	4P	FSQ-26/27/1B-E-G24q=3
MASTER PL-C 26W/830/4P 1CT/5X10BOX	G24Q-3	4P	FSQ-26/30/1B-E-G24q=3
MASTER PL-C 26W/830/4P 1CT/5X10CC	G24Q-3	4P	FSQ-26/30/1B-E-G24q=3
MASTER PL-C 26W/840/4P 1CT/5X10BOX	G24Q-3	4P	FSQ-26/40/1B-E-G24q=3
MASTER PL-C 26W/840/4P 1CT/5X10CC	G24Q-3	4P	FSQ-26/40/1B-E-G24q=3
MASTER PL-C 26W/865/4P 1CT/5X10BOX	G24Q-3	4P	

<sup>3</sup> 'Cap-Base Information' value description(s): '4P' = 4 Pins



### Logistic data

Commercial product name	SAP Packing (Piece)/Pack-aging configuration <sup>1</sup>	Numerator - Packs per -outer box	Ordering number	Material Nr. (12NC)	SAP Gross Weight (Piece)	Net Weight (Piece)	EAN-3
				(9279...)	(g)	(g)	
MASTER PL-C 10W/830/4P 1CT/5X10BOX	CT / 50	50	871150062329470	07083040	53.23	41.4	8711500711021
MASTER PL-C 10W/840/4P 1CT/5X10BOX	CT / 50	50	871150062330070	07084040	53.23	41.4	8711500711038
MASTER PL-C 13W/827/4P 1CT/5X10BOX	CT / 50	50	871150062326370	07182740	61.93	49.9	8711500715715
MASTER PL-C 13W/827/4P 1CT/5X10CC	CT / 50	50	692341076121400	07182705	74.00	60.0	6923410762259
MASTER PL-C 13W/827/4P 1CT/5X10CC	CT / 50	50	871150062326300	07182701	61.93	49.9	8711500715715
MASTER PL-C 13W/830/4P 1CT/5X10BOX	CT / 50	50	871150062331770	07183040	61.93	49.9	8711500715722
MASTER PL-C 13W/830/4P 1CT/5X10CC	CT / 50	50	692341076122100	07183005	74.00	60.0	6923410762266
MASTER PL-C 13W/830/4P 1CT/5X10CC	CT / 50	50	871150062331700	07183001	61.93	49.9	8711500715722
MASTER PL-C 13W/840/4P 1CT/5X10BOX	CT / 50	50	871150062332400	07184002	61.93	49.9	8711500715739
MASTER PL-C 13W/840/4P 1CT/5X10BOX	CT / 50	50	871150062332470	07184040	61.93	49.9	8711500715739
MASTER PL-C 13W/840/4P 1CT/5X10CC	CT / 50	50	692341076123800	07184005	74.00	60.0	6923410762273
MASTER PL-C 13W/865/4P 1CT/5X10BOX	CT / 50	50	871150027703900	07186501	61.93	49.9	8711500277114
MASTER PL-C 13W/865/4P 1CT/5X10CC	CT / 50	50	692341076124500	07186505	74.00	60.0	6923410762280
MASTER PL-C 18W/827/4P 1CT/5X10BOX	CT / 50	50	871150062327000	07282701	66.25	55.3	8711500715869
MASTER PL-C 18W/827/4P 1CT/5X10BOX	CT / 50	50	871150062327070	07282740	66.25	55.3	8711500715869
MASTER PL-C 18W/827/4P 1CT/5X10CC	CT / 50	50	692341076125200	07282705	80.00	66.0	6923410762297
MASTER PL-C 18W/830/4P 1CT/5X10BOX	CT / 50	50	871150062333170	07283040	66.25	55.3	8711500715890
MASTER PL-C 18W/830/4P 1CT/5X10CC	CT / 50	50	692341076126900	07283005	80.00	66.0	6923410762303
MASTER PL-C 18W/830/4P 1CT/5X10CC	CT / 50	50	871150062333100	07283001	66.25	55.3	8711500715890
MASTER PL-C 18W/840/4P 1CT/5X10BOX	CT / 50	50	871150062334800	07284001	66.25	55.3	8711500715906
MASTER PL-C 18W/840/4P 1CT/5X10BOX	CT / 50	50	871150062334870	07284040	66.25	55.3	8711500715906
MASTER PL-C 18W/840/4P 1CT/5X10CC	CT / 50	50	692341076127600	07284005	80.00	66.0	6923410762310
MASTER PL-C 18W/840/4P 1CT/5X10CC	CT / 50	50	871150027631500	07284003	66.25	55.3	8711500275899
MASTER PL-C 18W/865/4P 1CT/5X10BOX	CT / 50	50	871150027704600	07286501	66.25	55.3	8711500277121
MASTER PL-C 18W/865/4P 1CT/5X10CC	CT / 50	50	692341076128300	07286505	80.00	66.0	6923410762327
MASTER PL-C 26W/827/4P 1CT/5X10BOX	CT / 50	50	871150062328770	07382740	75.84	60.4	8711500716033
MASTER PL-C 26W/827/4P 1CT/5X10CC	CT / 50	50	871150027632200	07382703	75.44	60.4	8711500275905
MASTER PL-C 26W/827/4P 1CT/5X10CC	CT / 50	50	871150062328700	07382701	75.44	60.4	8711500716033
MASTER PL-C 26W/830/4P 1CT/5X10BOX	CT / 50	50	871150062335570	07383040	75.84	60.4	8711500716040
MASTER PL-C 26W/830/4P 1CT/5X10CC	CT / 50	50	692341076130600	07383005	91.00	75.0	6923410762341


More data see next page

Commercial product name	SAP Packing (Piece)/Pack-aging configuration <sup>4</sup>	Numerator - Packs per outer box	Ordering number	Material Nr. (12NC)	SAP Gross Weight (Piece)	Net Weight (Piece)	EAN-3
MASTER PL-C 26W/830/4P 1CT/5X10CC	CT / 50	50	871150027633900	07383003	75.44	60.4	8711500275912
MASTER PL-C 26W/830/4P 1CT/5X10CC	CT / 50	50	871150062335500	07383001	75.44	60.4	8711500716040
MASTER PL-C 26W/840/4P 1CT/5X10BOX	CT / 50	50	871150062336200	07384002	75.44	60.4	8711500716057
MASTER PL-C 26W/840/4P 1CT/5X10BOX	CT / 50	50	871150062336270	07384040	75.44	60.4	8711500716057
MASTER PL-C 26W/840/4P 1CT/5X10CC	CT / 50	50	692341076131300	07384005	91.00	75.0	6923410762358
MASTER PL-C 26W/840/4P 1CT/5X10CC	CT / 50	50	871150027634600	07384004	75.44	60.4	8711500275929
MASTER PL-C 26W/865/4P 1CT/5X10BOX	CT / 50	50	692341076132000	07386505	91.00	75.0	6923410762365
MASTER PL-C 26W/865/4P 1CT/5X10BOX	CT / 50	50	871150027705300	07386501	75.44	60.4	8711500277138


<sup>4</sup> 'SAP Packing (Piece)/Packaging configuration' value description(s): 'CT / 50' = CARTON



### Spectral power distribution

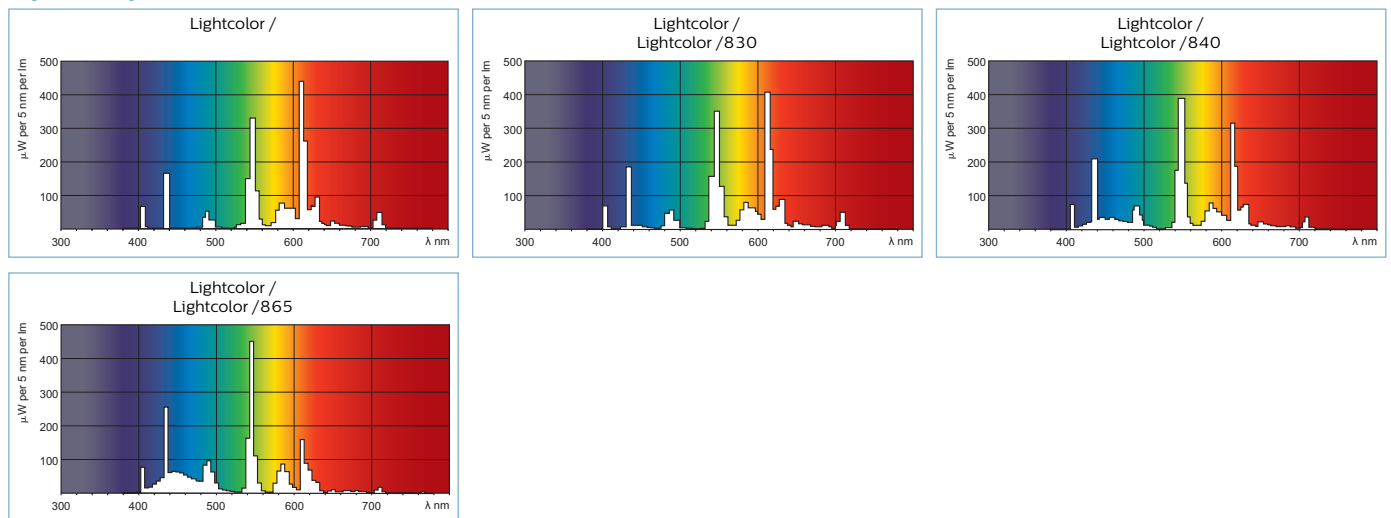

### Performance diagrams

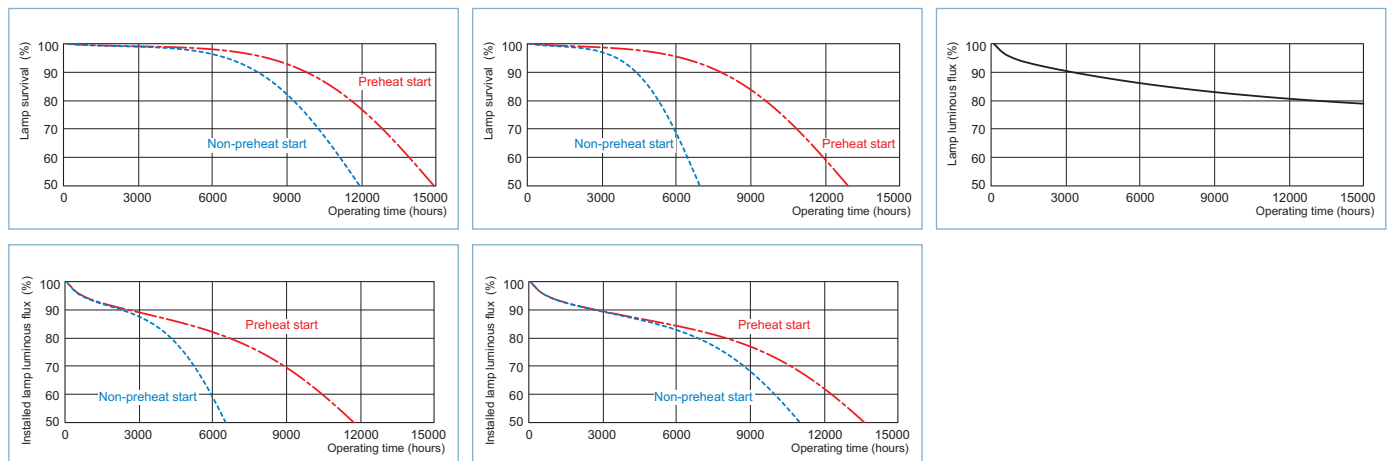

### Cap-Base Overview

